



**Exactly What You Need™**

BOB-CAT® "Classic"  
handles and controls.

Five forward  
speeds and one  
reverse speed.

Productivity-enhancing  
five-gallon fuel tank.

Zero-maintenance  
heavy duty  
sealed spindles.

7-gauge, unitized cutting  
and engine decks.

32-, 36- or 48-inch  
cutting decks.

## CLASSIC PRO GEAR DRIVE WALK-BEHIND MOWER

This winning combination of premium performance and exceptional value is just what you need to make short work of even the toughest jobs. Our economical, commercial-grade walk-behind mower delivers high quality of cut with bagging and mulching capabilities.

- **Operator-friendly fingertip controls – require minimal pressure to hold**
- **Heavy-gauge frame for durability**
- **Long-life belts and blades with fewer service points**
- **Maintenance-free spindles and wheel bearings mean less down-time**
- **Extreme Discharge System for superior clipping dispersal.**
- **Space-saving fold-up discharge chute – for easier transport**

**High Quality of Cut. Exceptional Value.**

[www.bobcatturf.com](http://www.bobcatturf.com) • 1-866-469-1242

# BOB-CAT® Classic Pro Gear Drive Walk-Behind Mower

## **POWER OPTIONS**

Kawasaki® FS Series .....16HP\* (11.9 kW) 603 cc Twin Cylinder, Air-cooled, Gas

### **All Models:**

Ignition .....Electronic with Recoil Start  
 Fuel Capacity.....5.0 gal. (18.9 l) Polyethylene Tank  
 Lubrication .....1.9 U.S. Quarts, Pressure with Filter  
 Air Cleaner .....Ducted Dual Element

## **DRIVETRAIN**

Transmission .....Gear Drive; Five Forward Speeds, One Reverse  
 Axle.....1" (25.4 mm) Diameter  
 Drive Belt .....Double Reinforced  
 Brakes.....Individual, Self-Energizing Hand Brakes Controlled by Traction Levers with Patented Double Roller Locks; Rod-Actuated Parking Brake

## **TIRES**

32 Rear Traction Drive:.....(2) 13 x 5-8 4-Ply Turf Tread Tubeless;  
 36 or 48 Rear Traction Drive: .....(2) 13 x 6.50-6 4-Ply Turf Tread Tubeless;  
 Front Casters:.....(2) 9 x 3.50-4 4-Ply Smooth Tread with Tube  
 Controls .....Fingertip Levers at Handles Control Power for Moving, Stopping and Turning; Throttle; Gear Selector; Wheel Drive Traction Levers with Locks; Blade Drive Switch; Dual-Wheel Parking Brake; Operator-Presence Controls; Keyed On/Off Switch  
 Speed (maximum) .....5.1 mph (8.2 km/h) Forward; 3mph (4.8 km/h) Reverse  
 Turning Radius .....Zero-Turn at Inside Wheel

## **DURADECKSTM**

Fixed .....32", 36" or 48" Side Discharge

## **DIMENSIONS**

### **All Models**

Overall Length.....78" (1.97 m)±  
 Overall Width with Chute Deflector Down .....32" - 39.3", 36" - 43.3", 48" - 55.3"

### **Transport Width (chute up)**


48" Model .....48" (1.22 m)  
 36" Model .....36.5" (.93 m)  
 32" Model .....32"  
**Height** .....40.3" (1.02 m)

### **Weight**

48" Model .....476 lbs. (216 kg)  
 36" Model .....428 lbs. (194 kg)  
 32" Model .....400 lbs. (181 kg)

## **ACCESSORIES**

GC Poly 3.75 or 5 Bushel Dump; 36 or 48 Mulch Baffle Kit with Eliminator Blades; Jumbo Grass Catcher, Metal Easy Dump, 4.3 cu. ft. Capacity. Fits All Models; ACC - ECO Plate, 36"-48", 36" and 48" Weight Kit.

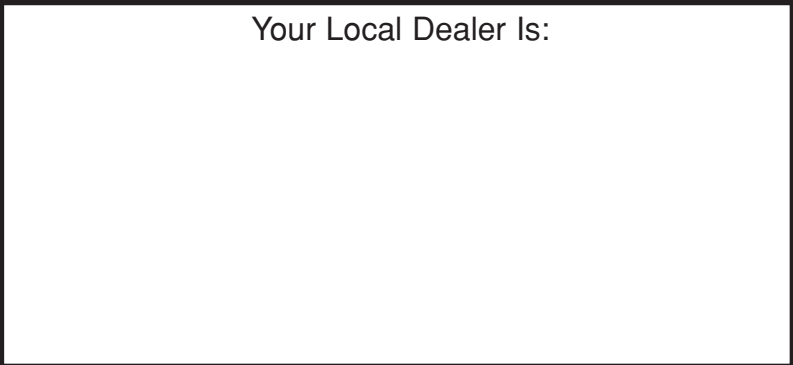

Your Local Dealer Is:

Specifications while correct at the time of printing may change without notice.  
 BOB-CAT® is registered trademark of Schiller Grounds Care, Inc.  
 © 2009 Schiller Grounds Care, Inc. All Rights Reserved.  
 One BOB-CAT Lane, Johnson Creek, WI 53038  
 www.bobcatturf.com • 920-699-2000

\*The power ratings are provided by the engine manufacturer. Actual power output is dependent on many factors including engine rpm, air density, and engine condition. For further information on engine horsepower, please contact Schiller Grounds Care customer service at 877-596-6337.